


# Shower Water Heater



> **ELCB Safety Protection**, with test and reset touch key, electricity leakage protection

- > **Energy Save with 98+% heating efficiency**
- > **Auto Thermostatic** with constant temperature within  $\pm 1^\circ\text{C}$  controlled
- > **Multi Protection**: electricity leakage protection, anti-scalding protection, over- pressure and over heat protection. Water and electricity isolation protection.
- > **Stepless Knob Switch** to adjust outlet temperature, hot water flows out constantly
- > **IP25 Waterproof**, to avoid wet inside with water-proof design
- > **Fault Auto detection**, by precise program inspection
- > Optional: DC Booster Pump / Indication Light / Shower Sets/ Flow Control Valve

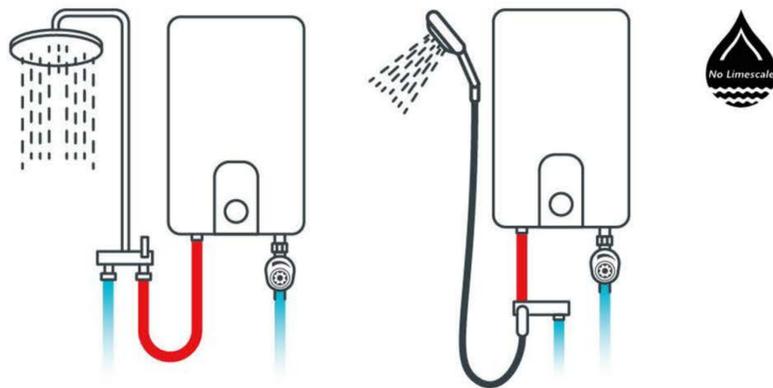

Model	WE35H	WE45H	WE55H	WE65H	WE38HDP	WE50HDP
Built In DC Pump	/				√	
Phase	1 Phase				1 Phase	
Voltage & Frequency	220-240V~ 50/60Hz				220-240V~ 50/60Hz	
Wattage	3.5kW	4.5kW	5.5kW	6.5kW	3.8kW	5kW
Max. Ampere Load	15.2A	19.6A	23.9A	30.4A	15.83A	20.83A
Temp. Range	30-55°C				30-55°C	
Overheat Protection	60°C				60°C	
Thermal Cut-off	90°C				90°C	
Recommend Wires	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	4mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>
Min. Waterflow to activate	1.0L/min	1.2L/min		1.5L/min	1.0L/min	1.2L/min
Rated Pressure	0.02-0.6MPa				0.02-0.6MPa	
Pipe Section	G1/2"				G1/2"	
Colors	White/ Black				White/ Black	
Product Size	400*83*225mm					
Package Size	480*130*275mm					
Loading Quantity	20GP: 1252pcs / 40GP: 2696pcs / 40HQ: 3204pcs					