



R1-1-3K7-SS Quick Installation Guide


Step 1: Drill 2 Fix Ø11 holes in the wall according to the dimensions, fix the wall mounting bracket with two expansion bolts.

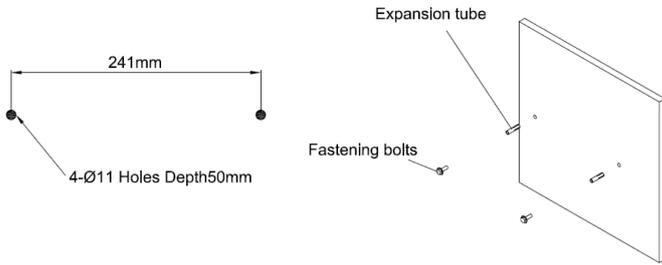


Step 2: Place the inverter on the wall-mounted bracket and install the fix screw.

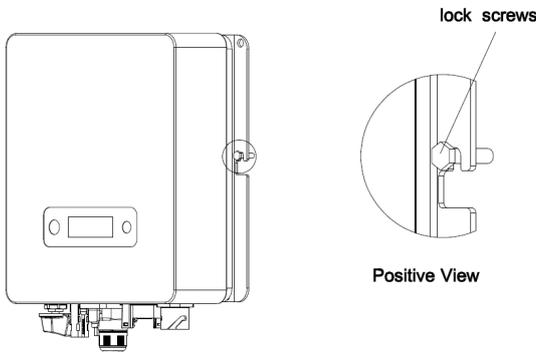


Step 3: Plug Grid side connector into AC connector of inverter end, rotate and tighten clockwise.

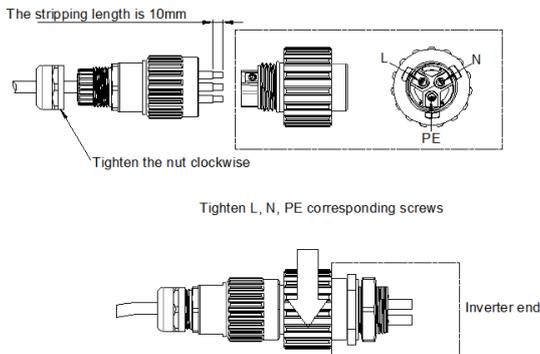


Step 4: Connect the PV string (DC input) to inverter PV terminal.

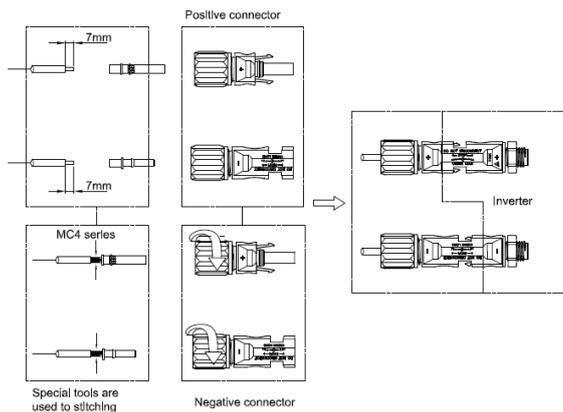

Step 5: Install the WIFI/GPRS module and other communication connections as shown in the figure below.

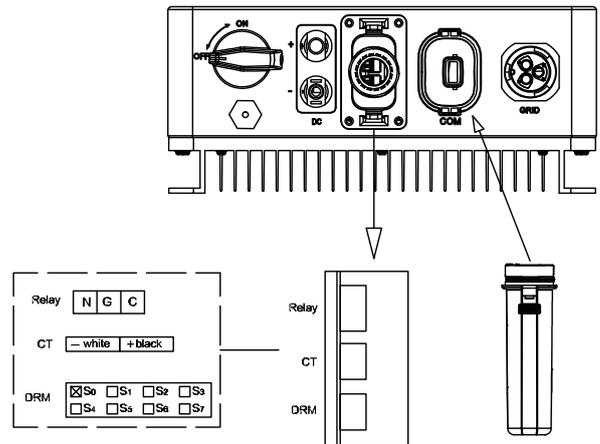

Step 6: Install the CT as shown below.

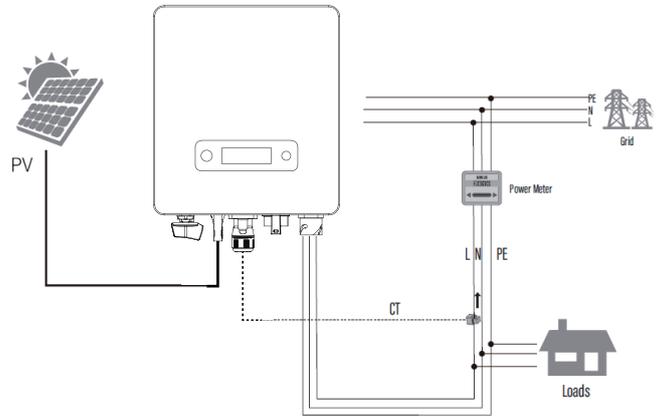

Step 7: Starting the inverter.

- 1) Turn on inverter DC switch to "ON" position.
- 2) Close the DC and AC circuit breaker.

Step 8: Commissioning.

- 1) Language setting

Long press the function button to enter the "set language" interface, hit function button less than 1s to choose the language and long press the function button to confirm the setting.

Set Language
factory Set

- 2) Country setting

Long press the function button to enter the "set country" interface, hit function button less than 1s to choose the country and long press the function button to confirm the setting.

Set Country
factory Set