


# OCPP AC Charger

## 7.4kW / 22kW

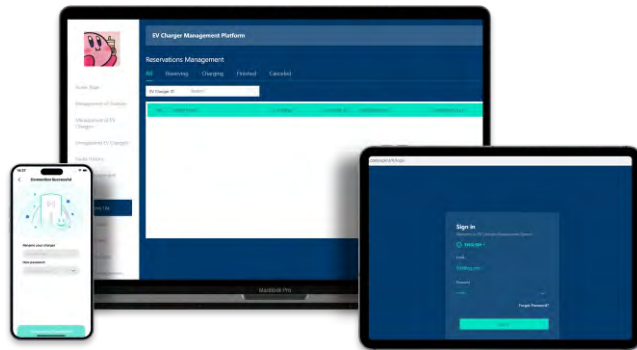

### Secure and Safe

**Safety Assurance**  
30mA Type A+6mA DC residual current protection.

**Anti-Welding Protection**  
Prevents welding incidents.

### Innovativeness

**Ergonomic Design**  
User-friendly enclosure design.

**Versatile Options**  
Optional design with T2S socket, switch between single-phase and three-phase.

### Smarter Charging

**Multiple Communication Support**  
Wi-Fi/4G/Ethernet communication options.

**Scheduled Charging via App**  
Set charging schedule using the app.

**Load Balancing System Control**  
Balancing the load distribution.

**PV Compatibility**  
Compatible with photovoltaic systems.

### Flexible Options

**Multiple Choices**  
Type 2 cable or Type 2 socket options, wall-mounted or floor-stand installation.

**Convenient Operations**  
RFID authentication, Plug and Play, APP options for easy start.

**All Colors Options**  
Available in all different colors.



Order Your Style



## Product Overview

Have enjoyable charging experience with the Beny wall-mounted OCPP AC charger, certified by authoritative associations. It is designed to be intelligent, reliable, convenient, and efficient. Control your charger by smart app and various connectivity.

## Product Advantages




Wall-Mounted



Full Protection




IP55/65 Rating



Wi-Fi/Ethernet /Bluetooth/4G



Smart APP



DLB and Solar Compatible



OCPP 1.6J

# Model Selection

OCPP AC Charger	BCP-A2N-P	BCP-B2N-P	BCP-AT2N-P	BCP-BT2N-P
				
Categorization	7.4kW		22kW	
Maximum Power	AC230 1-Phase		AC400 3-Phase	
Input Voltage /Output voltage	50/60Hz			
Input Frequency	Tethered	Socket	Tethered	Socket
Meter	Built-in metering chip + external MID meter (optional)			
Display	LED Lights			
RFID	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
DLB	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Wi-Fi	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Ethernet	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Bluetooth	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4G	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Over Voltage &Under Voltage Protection	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Emergency Stop	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Over Current Protection	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
CP Signal Short Circuit Protection	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Over Temperature Protection	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Lightning Protection	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Contactors Adhesion Protection	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Protection Degree	IP65	IP55	IP65	IP55
Environment Temperature	-25°C~+55°C			
Maximun Altitude	<2000m			

: Standard    : Optional

