




Under Sink Water Heater

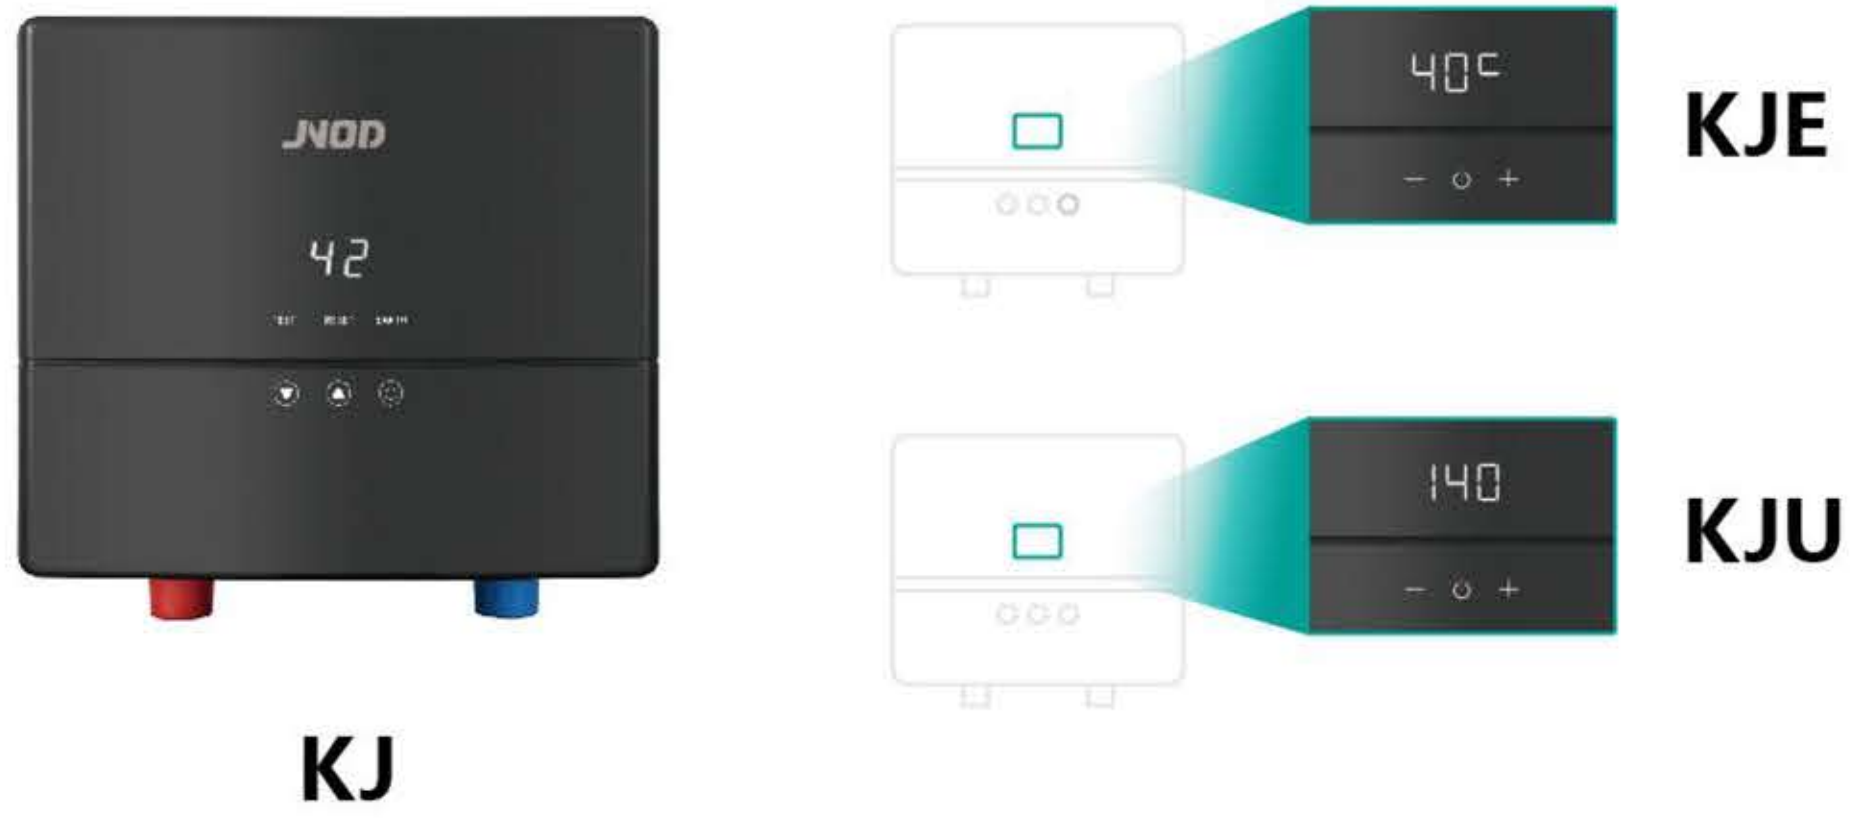

- > **Reversible Installation** with reversible digits

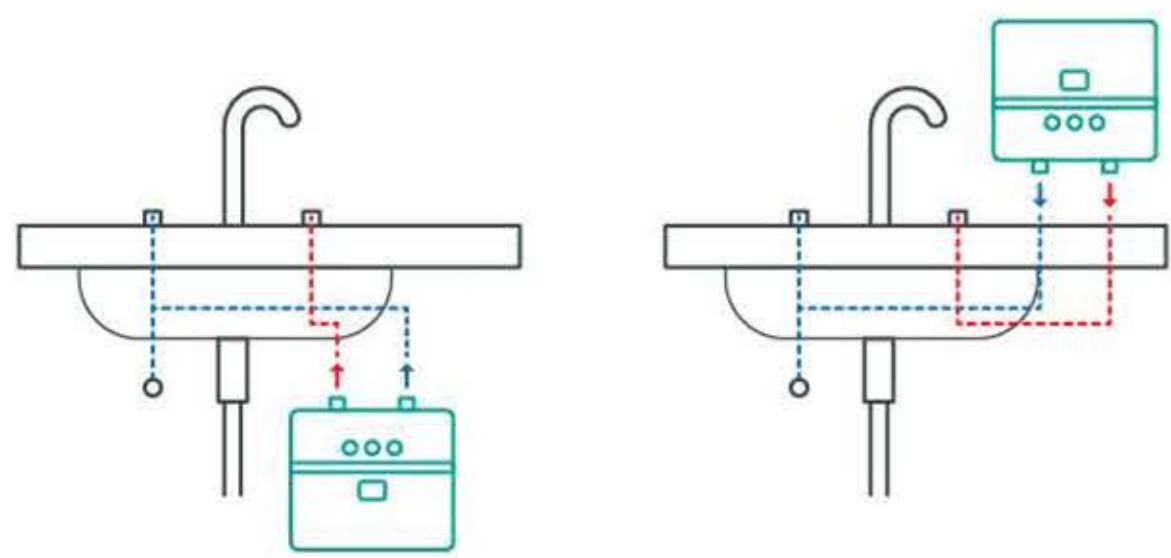

- > **ELCB protection** with Test & Reset (KJ Version ONLY)
- > **Real-time EARTH Detect** to check electricity leakage condition (KJ Version ONLY)
- > **Point of Use / Multi-point Use** for kitchen, basin single point or two points using endless hot water by 24 hours
- > **98+% Heating Efficiency** with hot water supplying continuously
- > **Compact Size** to install inside cabinet, public area easily
- > **Auto Thermostatic** with constant temperature within $\pm 1^{\circ}\text{C}$ controlled
- > **WiFi Connection Optional**, user friendly

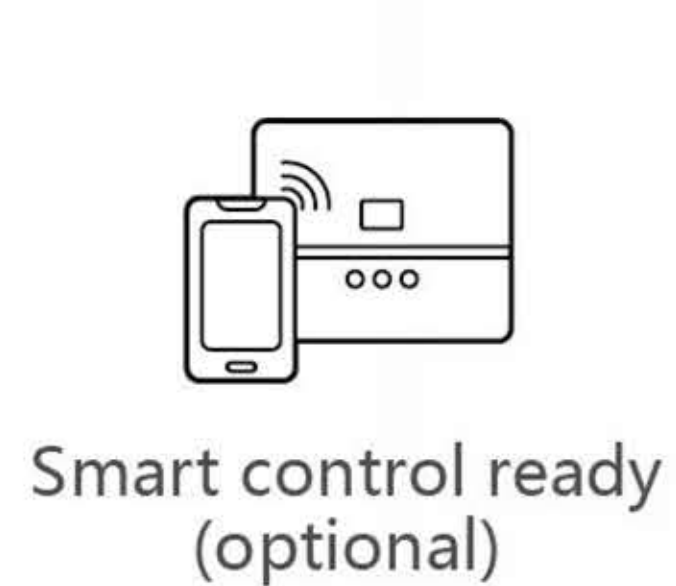

Model	KJ(E)35	KJ(E)45	KJ(E)55	KJ(E)60	KJU135	KJU144
Phase	1 Phase					
Certificate	CE CB				ETL	
Voltage Frequency	220-240V50/60Hz				110-120V	
Wattage	3.5kW	4.5kW	5.5kW	6kW	3.5kW	4.4kW
Rated Current	15.9A	20.5A	25A	27.3A	29.2A	36.6A
Circuit Breaker	20A	32A	32A	40A	30A	40A
Min.Waterflow toActivate	1L/min				0.26GPM	0.31GPM
Recommend Wires	1.5mm ²	2.5mm ²	2.5mm ²	4mm ²	12AWG	10AWG
Overheat Protection	75°C					
Temp.Range	30-55°C					
Thermal Cut-off	95°C					
Rated Pressure	0.02-0.6MPa					
Pipe Section	G1/2"					
Product Size	226*78*196mm					
Package Size	290*115*270mm					
Loading Quantity	20GP:2440pcs/40GP:5264pcs/40HQ:6200pcs					